





Condenser Stand, Ductwork Stand Supports

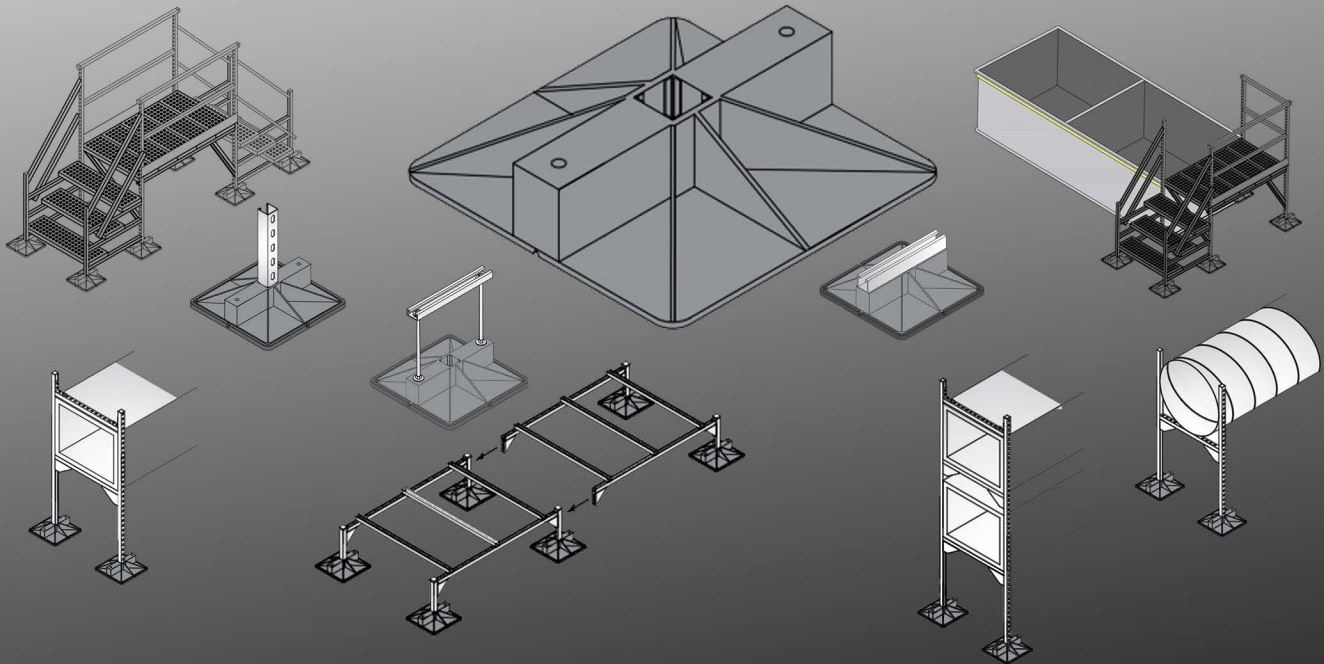

Mighty Mount Jr. Pipe Supports

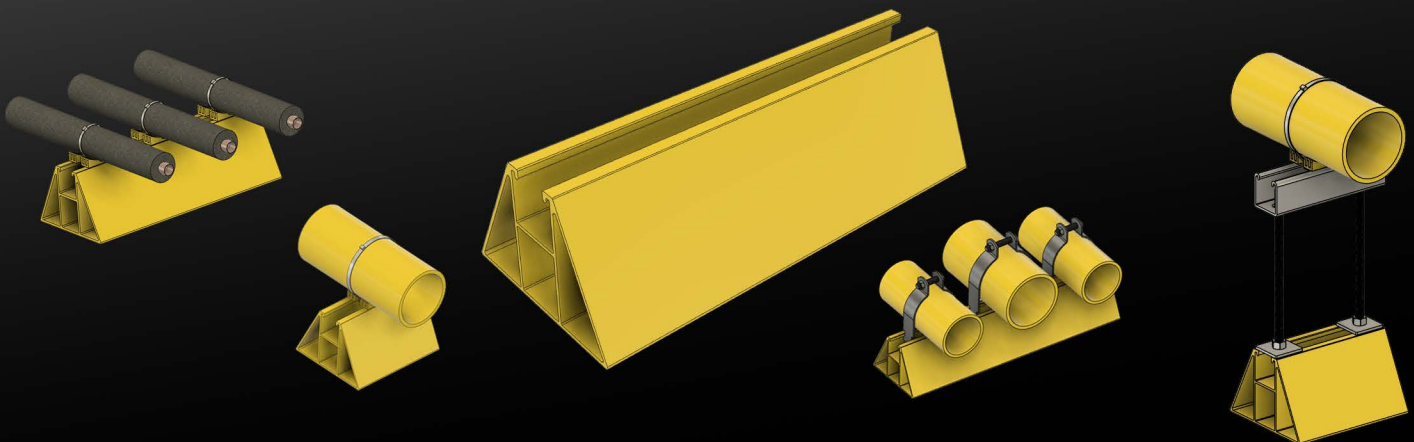







NYLON BASE

NB-500 Nylon Base

Non-Penetrating Roof Top Supports

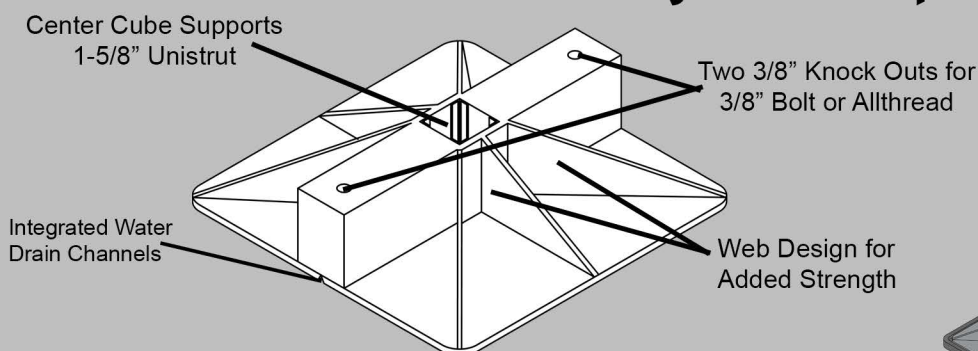

- ✓ Molded from Nylon 6x6 with 30% Fiberglass Fill Making it a Very Strong Footing
- ✓ NB-500 Capacity 432 lbs*
- ✓ NB-500 with SB-13 Capacity 500 lbs*
- ✓ 12" Square Footing
- ✓ Center Cube Fits 1-5/8" Unistrut and 1-1/4" Pipe
- ✓ Integrated Water Drain Channels
- ✓ Webbed Design Distributes Weight Uniformly Across the Base.
- ✓ Two 3/8" Hole Knock Outs for 3/8" Bolt or Allthread

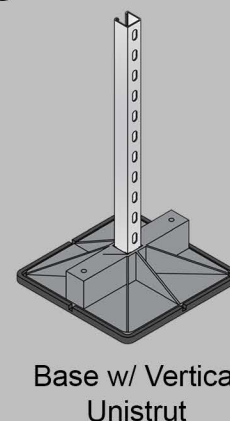


NB-500 Nylon Base and
SB-13 Rubber Sub-Base
Ships Together



Rubber Sub-Base

1/2" Thick x 13" x 13"

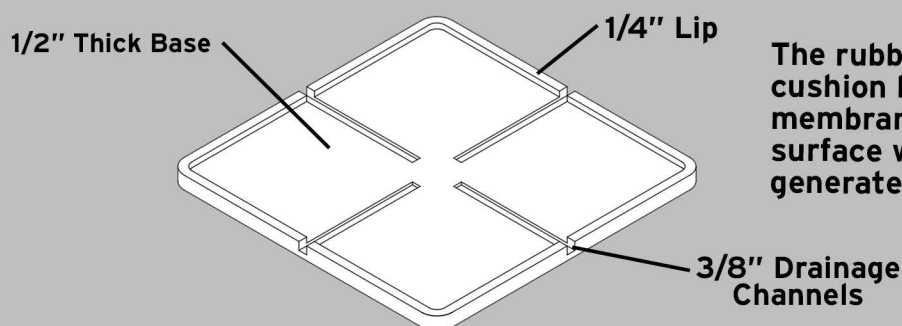

The rubber sub-base provides a protective cushion between the nylon base and the roof membrane, helping prevent damage to the roofing surface while also reducing vibration and noise generated by the supported equipment.


The rubber sub-base is made from durable 60 Durometer Shore A SBR rubber, providing a hardness comparable to heavy-duty truck tire tread

*Load is based on limiting the load on the roof membrane to 3 psi.




DUCTWORK STANDS


NON-PENETRATING ROOF TOP SOLUTION FOR INSTALLING DUCTWORK ON FLAT ROOFS




ROUND DUCT SUPPORT
DESIGN MODEL: **RDS**




ENCLOSED DUCT SUPPORT
DESIGN MODEL: **EDS**

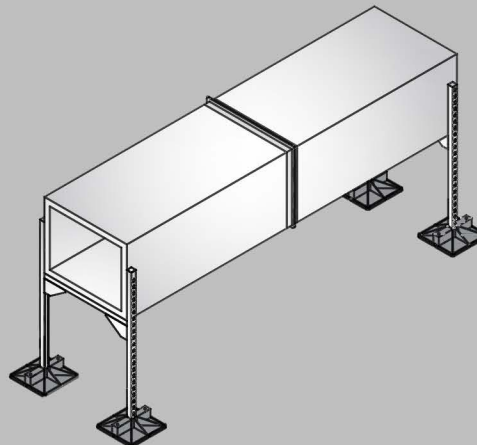


OPENED DUCT SUPPORT
DESIGN MODEL: **ODS**

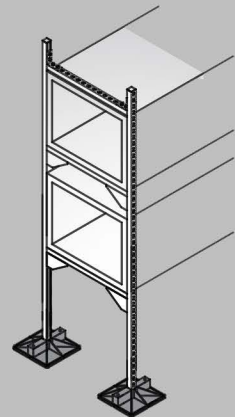


MULTI-TIER DUCT SUPPORT
DESIGN MODEL: **MTDS**



1-5/8 Unistrut
Support for
Ductwork and
Condenser
Support Stands



13/16" Unistrut
with Adjustable
3/8" All-thread
Rod



1-5/8" Unistrut
Bolted to Base

**NB-500 Nylon Base with Rubber Sub-base
can support 500* lbs. each.**


***500 lb. load is based on limiting the load on the roof membrane to 3 psi.**

NB-500 UV Rated





VRF STANDS


One Stop Shop for all Your VRF Condenser Stands & Accessories

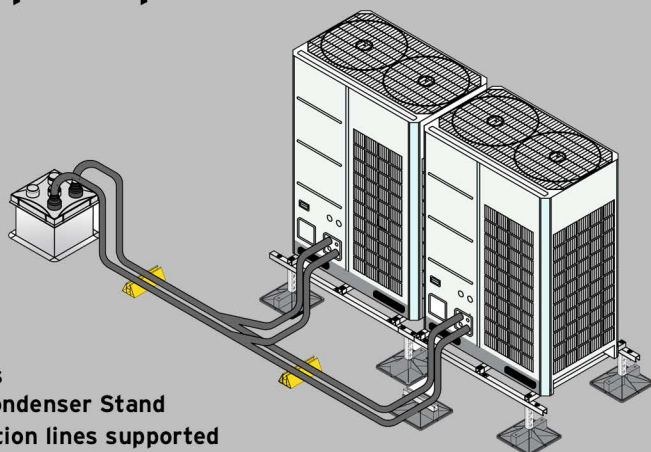

**Twin VRF Units
On a Double Condenser Stand
With Refrigeration lines supported
On a Mighty Mount Nylon Base and Rubber Sub-base
The Lines Penetrate the Roof through an N-5 Rubber
Boot, 5-Port Curb Cap and 15" Curb**

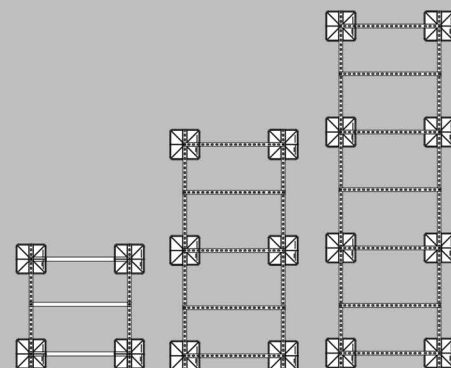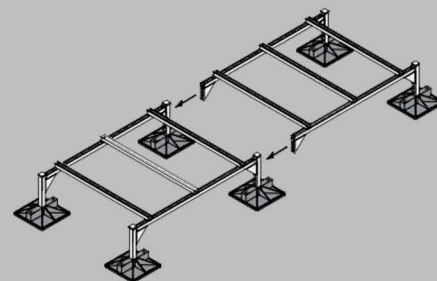

Top View of Single, Double and Triple VRF Condenser Stands




**NB-500
Nylon Base
NB-500 UV Rated
Rubber
Sub-base**

**NB-500 Nylon Base with
Rubber Sub-base can
support 500* lbs. each.**

NB-500 UV Rated


Condenser stands are available in standard sizes for single, double, and triple units and are compatible with all major VRF manufacturers. Custom stands can also be fabricated to special sizes to accommodate specific project requirements and installation conditions.




Single Condenser Stand



Double Condenser Stand



Triple Condenser Stand

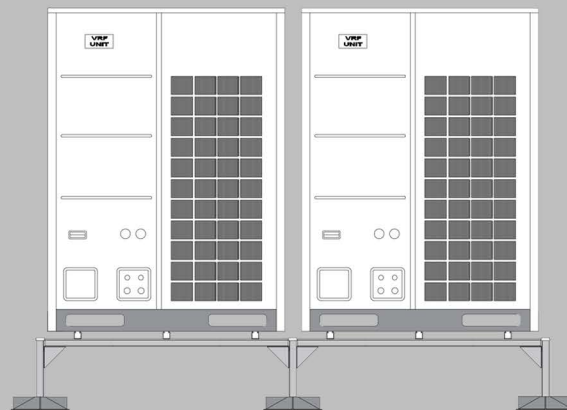


***500 lb. load is based on limiting the load on the roof membrane to 3 psi.**




Mighty Mount Jr.


12" MM Jr. Base with Copper Pipe and Cushion Clamps

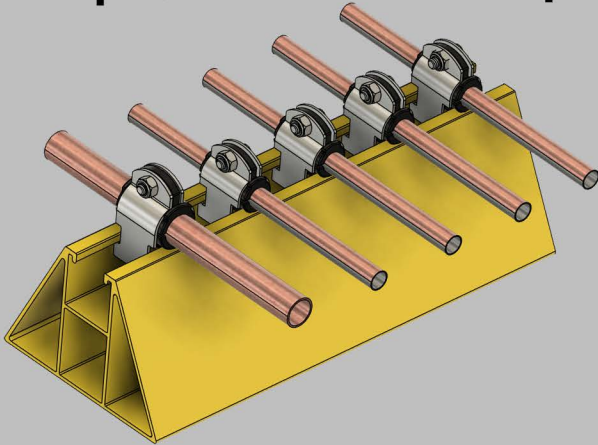


12" MM Jr. Base with Insulated Refrigeration Pipe and Universal Pipe Clamp

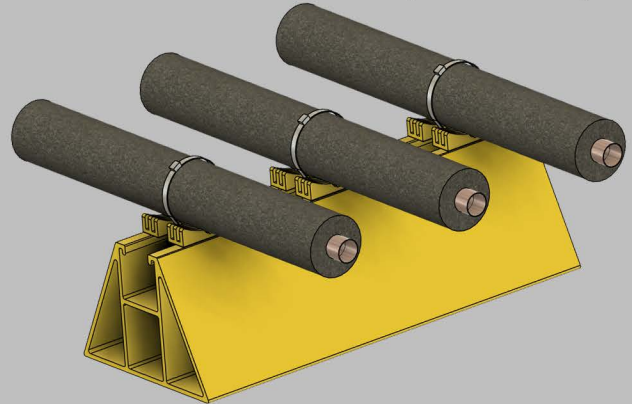


18" MM Jr. Base with One 4" and Two 3" Gas Pipe

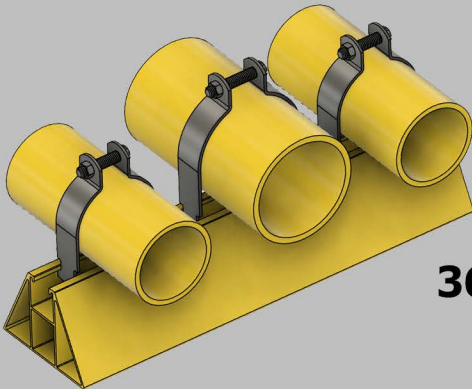

12" MM Jr. Base with 2-1/2" Gas Pipe and Pipe Clamp

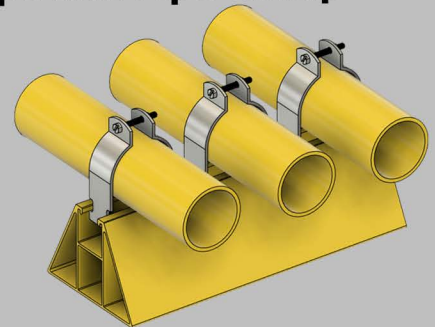

36" MM Jr. Base with Four 4" Gas Pipe

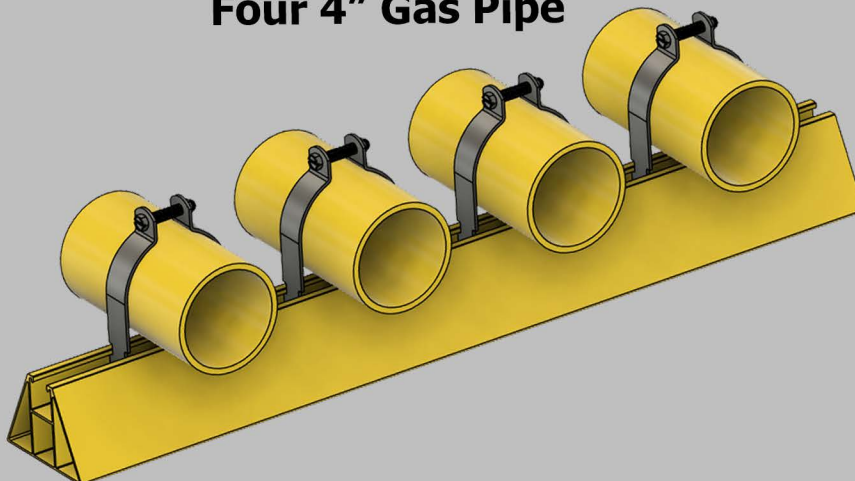




Mighty Mount Jr.

Gas Pipe Support System


3.5" High x 5.0" Wide

6" Mighty Mount Jr. Can Support Gas Pipe up to 3" in Diameter, Spaced 10 Foot on center*

MM Jr. with Built-in Unistrut



6" MM Jr. Base with 3" Gas Pipe and Universal pipe Clamp and Stainless Steel Zip Tie




6" MM Jr. Base with 3" Gas Pipe and Pipe Clamp




Stainless Steel Clamp

For Use with Gas Pipe 1/2" to 4"




Universal Pipe Clamp

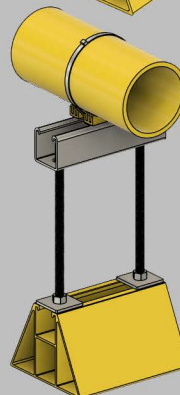

6" MM Jr. Base with 3" Gas Pipe Supported on 3/8" Allthread Rod and Universal Pipe Clamp with Stainless Steel Zip Tie.

Mighty Mount Junior	
Schedule 40 Gas Pipe	
Size	Weight
2" Dia.	3.66 lb./ft.
2.5" Dia.	5.80 lb./ft.
3" Dia.	7.58 lb./ft.
3.5" Dia.	9.12 lb./ft.
4" Dia.	10.80 lb./ft.

Mighty Mount Jr. Rubber Support Pad

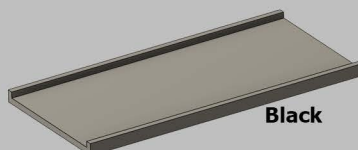

Black

**Made of SBR Rubber
5-3/4" wide X 12" Long
1/4" Thick**


Available Lengths 6", 12", 18", 36"

6" Supports 90 lbs.

12" Supports 180 lbs.

18" Supports 270 lbs.

36" Supports 540 lbs.

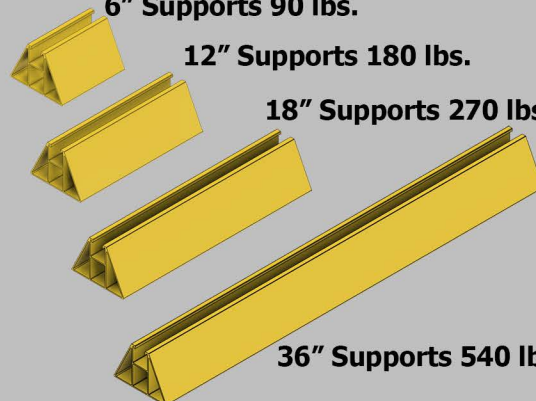

*Allowable load is limiting the load on the roof membrane to 3 psi.




Cross Over Stairs




- **Maximize safety by creating clear walkways over rooftop obstacles.**
- **Built to last - heavy duty, weather resistant construction to ensure long term performance.**
- **Tailored to your roof - available in multiple sizes & configurations to fit your layout.**
- **Available as knockdown or factory assembled for a fast and hassle free install.**

Custom Built to your Specifications


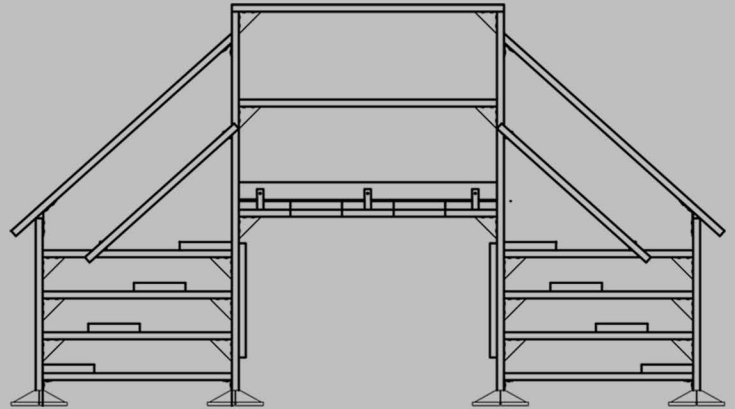


Side View

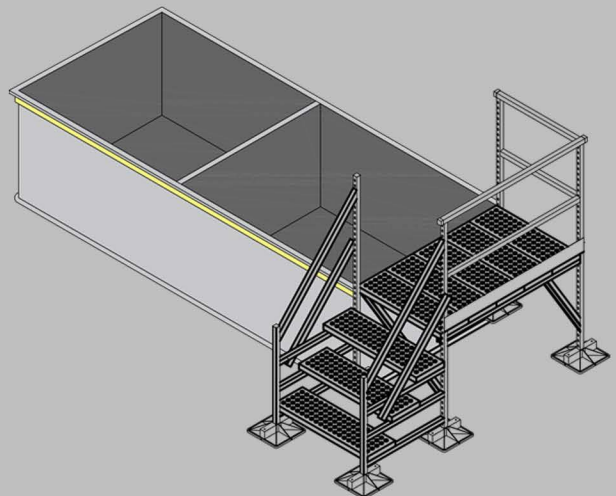

HRANEC

Corporation

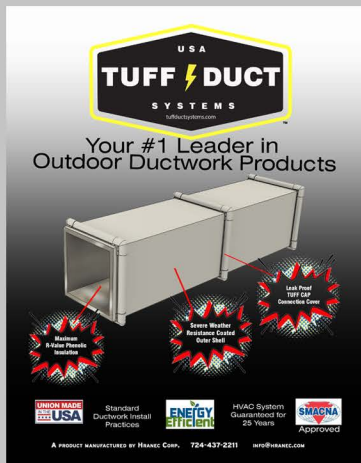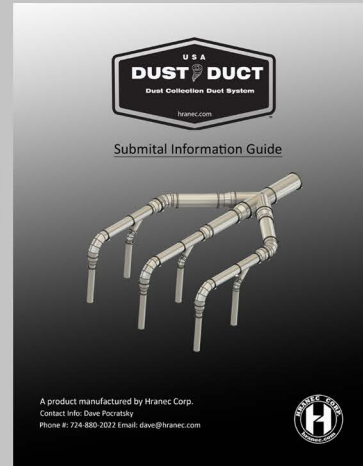

724-437-2211
www.hranec.com